



SCHOOL BUS G5

Versatile transportation for up to 30 passengers



Integrated child seats and 3 points lap and shoulder seat belts are available for enhanced safety and versatility.



Maximum visibility of loading zone is provided by fully glassed entrance door and unobstructed "More-View" window.

Standard 32" electric double opening door.



LED clearance lights, direction lights and stop lights are standard equipment offering enhanced safety, while reducing operating and maintenance costs.



Also Available

Special-needs minibus with double-leaf wheelchair doors offer protection on both sides of the lift thus adding to passenger security, while offering superior weather seal and door strength.

BODY DIMENSIONS	MODEL	100	200	200C
	Maximum passenger capacity	24	30	24
	Number of rows	5	5	5
	Exterior length overall	264.5"	291"	291"
	Exterior width overall	96"	96"	96"
	Exterior height overall	110"	112"	118"
	Interior floor length	151.25"	177.25"	177.25"
	Interior width at hip	93"	93"	93"
	Interior height at center line	76"	76"	76"
	Entrance door	32" x 80"	32" x 80"	32" x 80"
Side windows	35" x 30"	35" x 30"	35" x 30"	
Rear bumper	3/16" x 9.5" with 12" wrap around			
GMC / CHEVY CHASSIS	MODEL	100	200	200C
	Wheelbase	139"	159"	159"
	Engine	6.0 L gas/6.6 L diesel		
	Transmission	4-speed automatic		
	GVWR	12,300 lbs	12,300 lbs / 14,200 lbs	
	Fuel tank	33 gallons		
	Brakes	4-wheel anti-lock, 4-wheel disc		
	Tires	LT225/75R16E all-season, blackwall		
	Alternator	145 amp		
	Battery	600 CCA	600 CCA (gas) 2 batteries 770 CCA each (diesel)	

STANDARD BODY EQUIPMENT	8 ways (4 amber and 4 red)	Mirrors rearview
	8 ways black around vinyl tape	Padding all doors
	Bumper steel	Paint exterior yellow
	Emergency triangular warning device*	Paint interior white
	Entrance door electric	Paint roof white
	Entrance door grab handle left	Paint rub rail black
	Floor steel	Rear door 2 windows
	Floor plywood 5/8" (5 ply)	Rear door 3 point slide bar latch
	Flooring grey rib in aisle	Rear door buzzer
	Flooring grey smooth under seat	Rear door retainer*
	Flooring steps grey with white nosing	Reflective tape rear emergency exit*
	FMVSS seat belt anchorage	Roof bow one piece, hat section type
	Heater 20,500 BTU	Rub rail floor level
	Interior below window embossed aluminum	Rub rail seat level with wrap around
	Interior mirror 6" x 16"	Shut-off valve under body
Joint strength	Speakers (2)	
Lights clearance LED	Stepwell light LED	
Lights dome (4)	Stop arm	
Lights marker LED	Undercoating	
Lights back-up incandescent	Windows back (2) tinted 62%	
Lights stop and tail LED	Windows rear door tinted 62%	
Lights turn LED	Windows side tinted 62%	
Mirrors crossview	*Standard in the US, optional in Canada	

OPTIONS	Air conditioning	Lift wheelchair tie-down
	Audio / PA. systems	Lights back-up LED
	Back-up sensors	Light monitoring system
	Barriers	Luggage containment systems
	Bumper aluminum	Paint roof yellow
	Driver side auxiliary step	Reflective exterior signs
	Electronic sleeping child monitoring system	Remote / heated mirrors
	Emergency equipment	Rub rail skirt level
	Entrance door grab handle right	Rub rail window level
	Floor plywood 5/8" (5 ply) marine grade	Seats
	Heater 42,000 BTU	Vandal lock system
	Integrated toddler seats	Video monitoring / tracking system
	Lap and shoulder belt seating	Wheelchair and occupant restraint system
	Lift door (Standard on model 200C)	Wheelchair lift with interlock device
	Lift door with tinted windows	
Lift wheelchair		

More options available...

Specifications shown in this brochure were in effect at time of printing. In keeping with its policy of continual improvement, Girardin Minibus reserves the right to change specifications without notice and without incurring obligations.



Galvanized Steel Structure and Side Impact Barriers

- Completely gasketed steel body frame ensures that all exterior elements, including dust, moisture and noise, remain outside the passenger compartment;
- Superior side impact protection is offered by the use of heavy-gauge steel side impact barriers that incorporate the seat rail into the design for extra strength.



Double Action Energy Absorbing Body Mounting Blocks

- Absorb road vibration;
- Reduce noise transfer to the cabin interior;
- Offer extended body durability;
- Smoother passenger ride;
- Prevent frame collapse;
- Eliminate the need for periodic tightening of body bolts.



Superior Insulation

- 1.5" fiberglass throughout;
- Insulated roof noise;
- Reduction in noise transfer into passenger compartment;
- Prevents condensation.




Extra Wide Body Design

- Aerodynamic styling;
- Wider seating for increased comfort;
- Wider aisle for increased safety;
- Better compartmentalization.

Floor Plans

A wide range of configurations to better accommodate your needs.

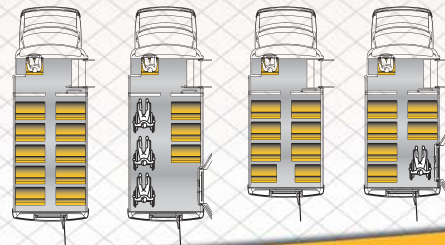

Girardin Minibus Inc.
Phone: (819) 477-8222
Fax: (819) 475-9633
www.girardin.com
www.mfsab.com
minibussales@girardin.com

Distributor: